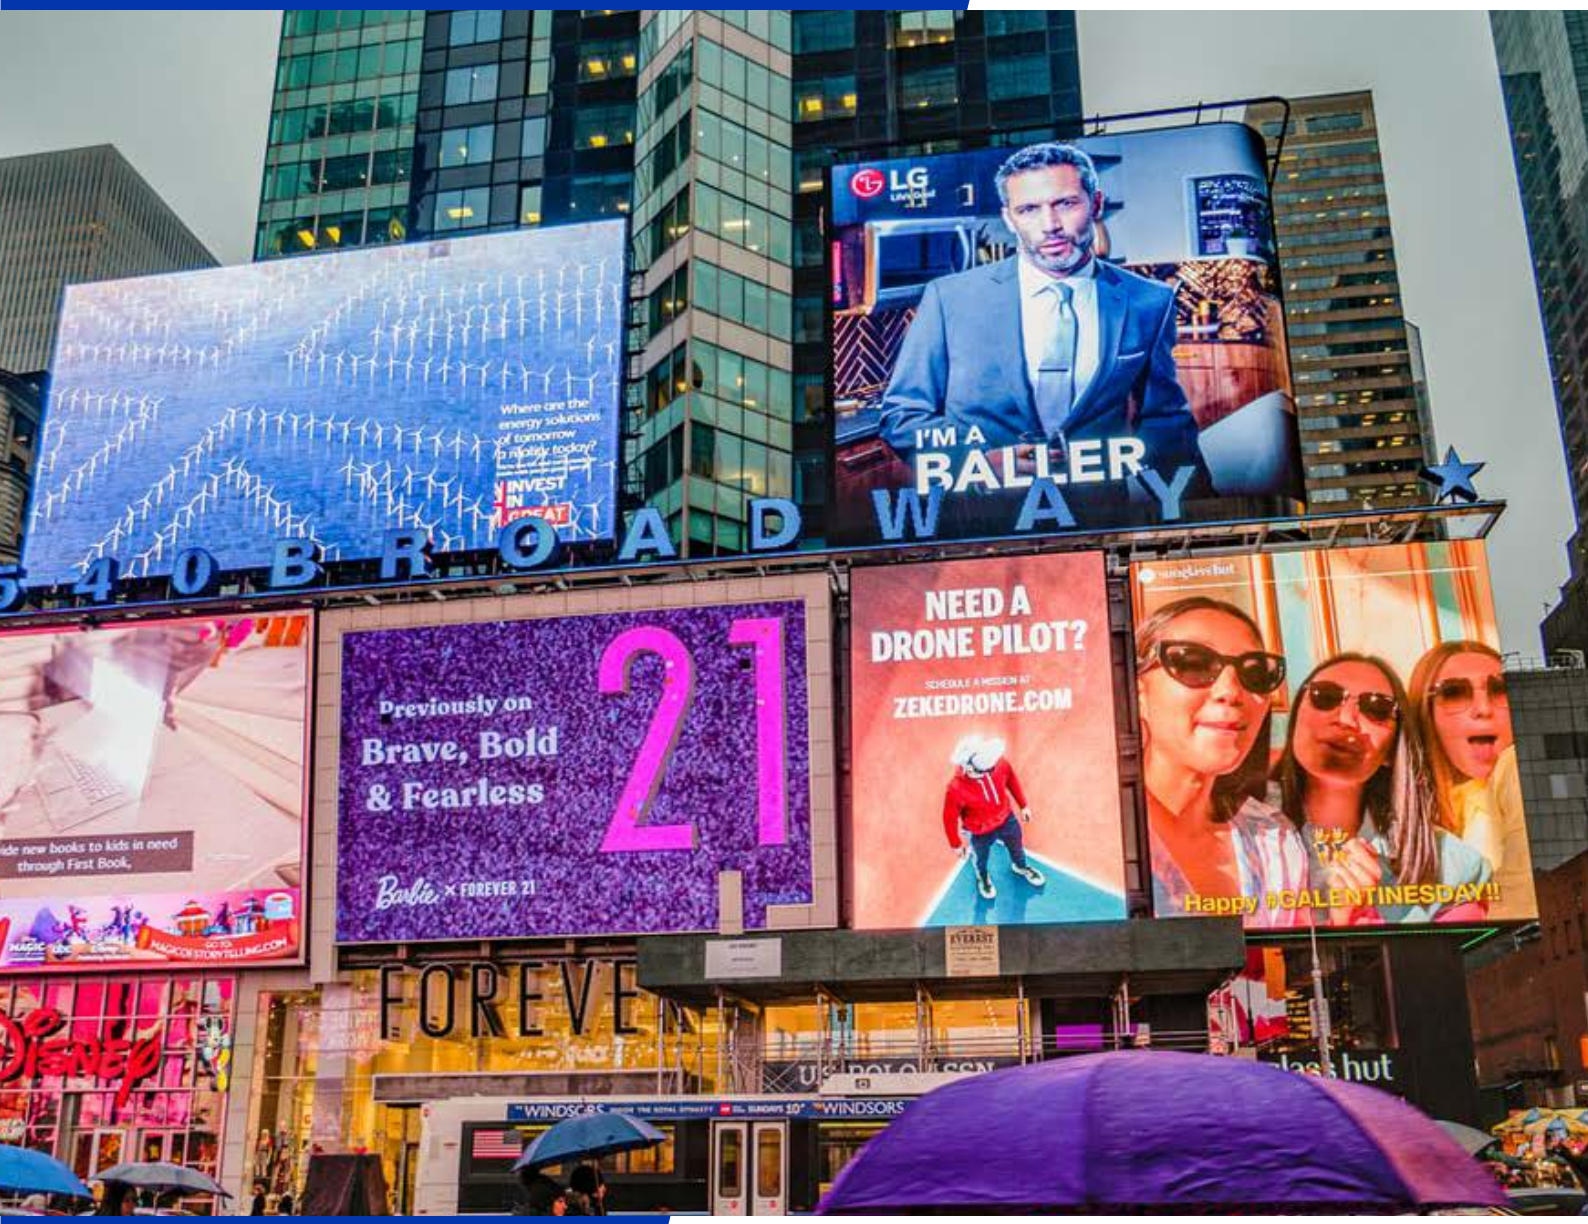


MileStrong

Bring Your ideas
Into Reality

Outdoor LED Display

SH Series Design

(4.16/5/6.25/8.33/10)

- Module Size: 450*300 mm
- Cabinet Size: 800*900/800*1200 mm

+86-138-2728-2423 info@mile-strong.com www.mile-strong.com



SH Series Design

IP65

SH Series Features

- Save power energy
- Save installation space
- Save installation structure
- Save transportation charges
- Save maintenance cost
- Save installation cost



800x900mm 800x1200m



Special Mask Design

Matte corrugation module mask to achieve ultra-high contrast.



Pre-maintenance

Support full-front and rear maintenance . Suits for all outdoor applications.

+86-138-2728-2423 info@mile-strong.com www.mile-strong.com

Product Weight

35% less than traditional iron cabinet



800*900


22.4KG/panel



800*1200

28KG/panel

Customizable Cabinet Size and Shape

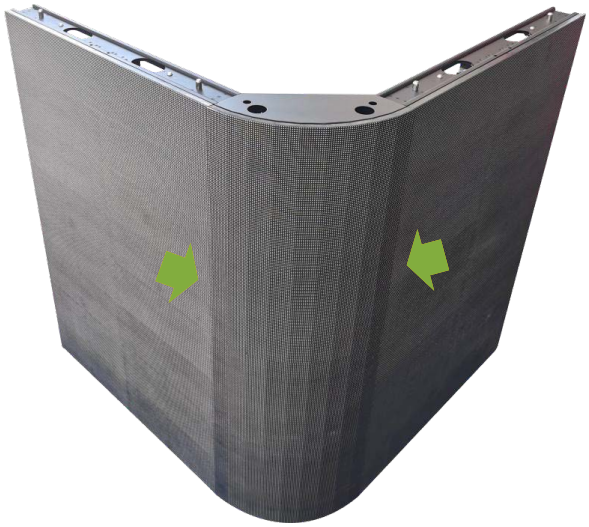





1600x900mm
stadium applications



400x900mm/450x1200mm
curve applications




800x900mm/800x1200mm
outdoor digital billboard applications

+86-138-2728-2423 info@mile-strong.com www.mile-strong.com

Save Space



Front side access available

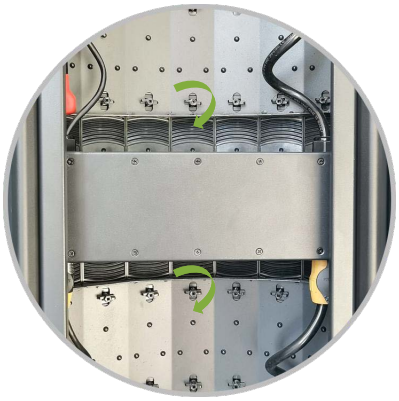


Rear side access available



Top side view



Rear side view

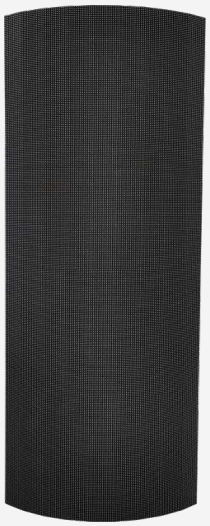

Front side view





Application


+86-138-2728-2423 info@mile-strong.com www.mile-strong.com

Cabinet Size


450x900mm
450x1200mm





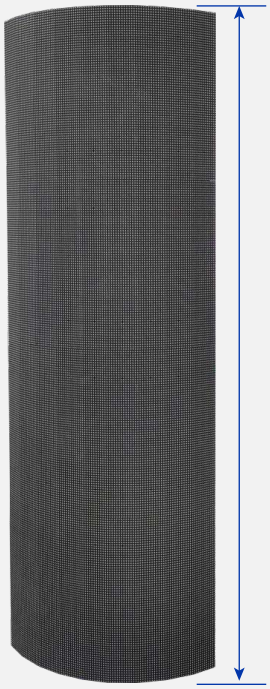



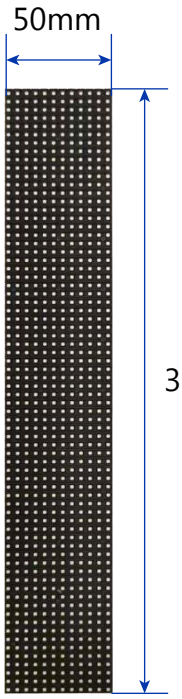

Module Size

Compatible with various pixel pitch P4.16/P5.0/P6.25/P8.33/P10, Module size 50×300mm, support IP65 protection level.






+86-138-2728-2423 info@mile-strong.com www.mile-strong.com

Stadium Screen / Perimeter Screen



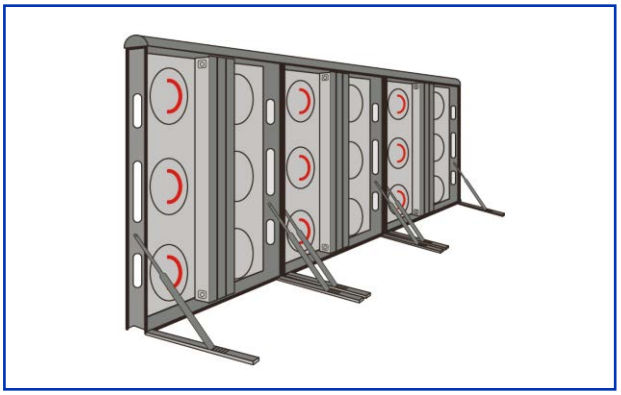

Specifications

Item	SH 4.16	SH 5	SH 6.25	SH 8.33	SH 10
Pixel Pitch (mm)	4.16	5	6.25	8.33	10
LED Type	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Physical Density (dots/sqm)	57,600	40,000	25,600	14,400	10,000
Module Size (mm)	400*300	400*300	400*300	400*300	400*300
Module Resolution	96*72	80*60	64*48	48*36	40*30
Module Quantity (W×H)	2*3 / 2*4	2*3 / 2*4	2*3 / 2*4	2*3 / 2*4	2*3 / 2*4
Panel Resolution(W×H)	192*216 / 192*288	160*180 / 160*240	128*144 / 128*192	96*108 / 96*144	80*90 / 80*120
Panel Size (mm)	800x900 / 800X1200				
Flatness (mm)	≤0.015				
Maintenance Mode	Front & Rear				
Brightness (nits)	6000~7500				
Color Temperature (K)	3200-9300 optional				
Viewing Angle (V/H)	160°/ 160°				
Contrast Ratio	5000:1				
Frame-Changing Frequently	50/60Hz				
Drive Mode	Constant current				
Refresh Rate	3840Hz				
Max Power Consumption (W/㎡)	600-800				
Avg Power Consumption (W/㎡)	100-200				
Electric Power Requirements	AC90-264V				